

ACCESS DOOR

Description:

Solid, leak proof, insulated, access door for round ducts.

Pressure rating: +20" W.G. to -10" W.G.

Service temperature range: -20°F to 200°F.

Options: Non-Insulated, Observation, and High Temperature.



<u>Door Size</u>	<u>Duct Size</u>
8" x 4"	5" - 9"
12" x 8"	10" - 20"
16" x 12"	21" - 36"
24" x 18"	37" - 64"


DUCT CONNECTION FLANGES

Spiralmate™ by
Ductmate Industries, Inc.

Available Sizes: 10" thru 72"

Factory Installed or Loose for
Field Installation

Material Options: Galvanized, Stainless Steel , PVC Coated, Aluminized.

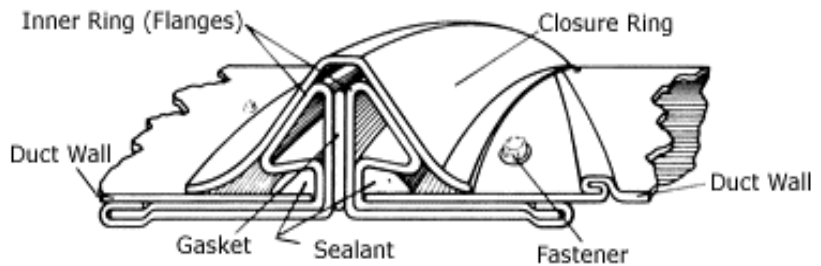

Accuflange™ by
Accuduct Manufacturing, Inc.

Available Sizes: 10" thru 96"

Factory Installed or Loose for
Field Installation.

Material Options: Galvanized,
Paint Grade, Stainless Steel ,
PVC Coated, Aluminum.

